


Rake Metal Installation Guide

Step 1


Cut a 4" wide strip of Ice and Water and place it 1" away from the metal rake edge.

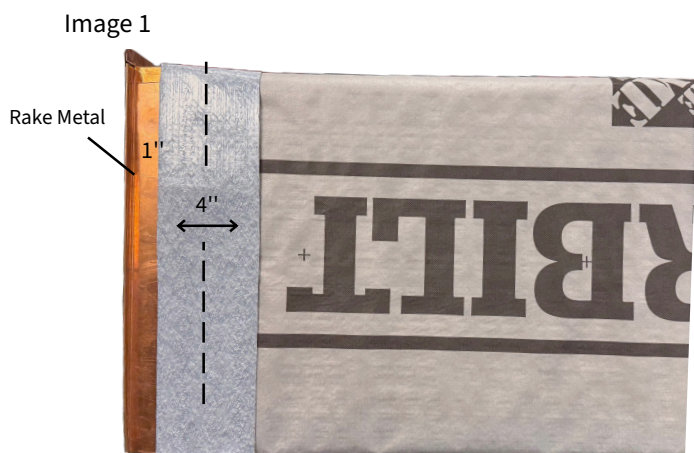

Step 2

Install the gable strip and fasten it properly. Then, place the bracket 1" away from the rake edge.

IMPORTANT: Do not nail or drill within 4" of the rake edge.

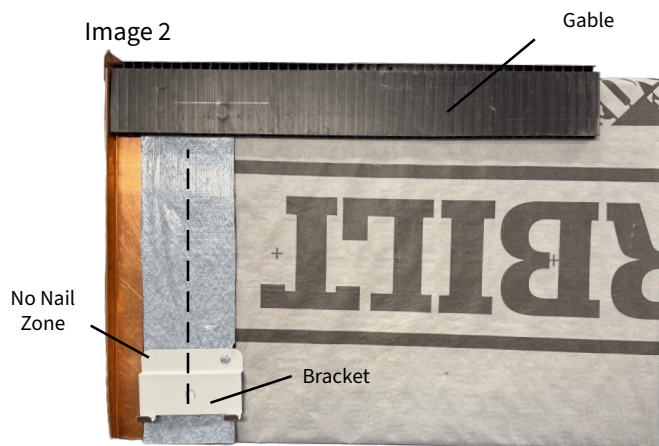

Step 3

Install the tile liner, followed by the tile.


IMPORTANT: Make sure the tile liner is no longer than 10 feet to prevent expansion due to heat and tile movement. Install the brackets at the joints of each tile.



Step 4

Install the tile liner on the ridge. Install the saddle and fasten it with a least 2 screws on each side of the saddle.

IMPORTANT: Make sure the screws are fastened at an angle, as shown in *image 4*.

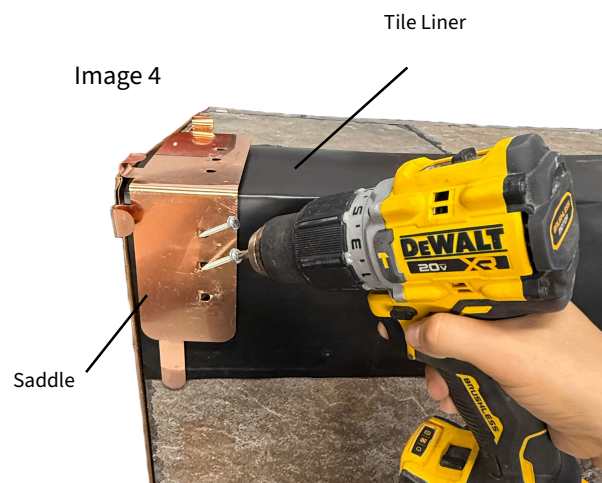


Step 5

Install the half tile and hold it in place using the upper tab, bending the lower tab.

IMPORTANT: Bend the lower left tab to secure the half tile, as shown in *image 5*.

Image 5

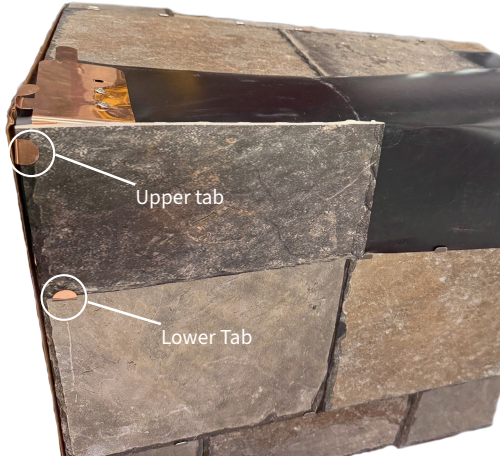

Step 6

Place the half tile on the other side of the gable and repeat the same procedure.

IMPORTANT: Always fasten the saddle with at least 2 screws on each side.

Image 6



Step 7

Finally, remove the tile liner excess using a utility knife, as shown in *Image 7*.

Image 6

